


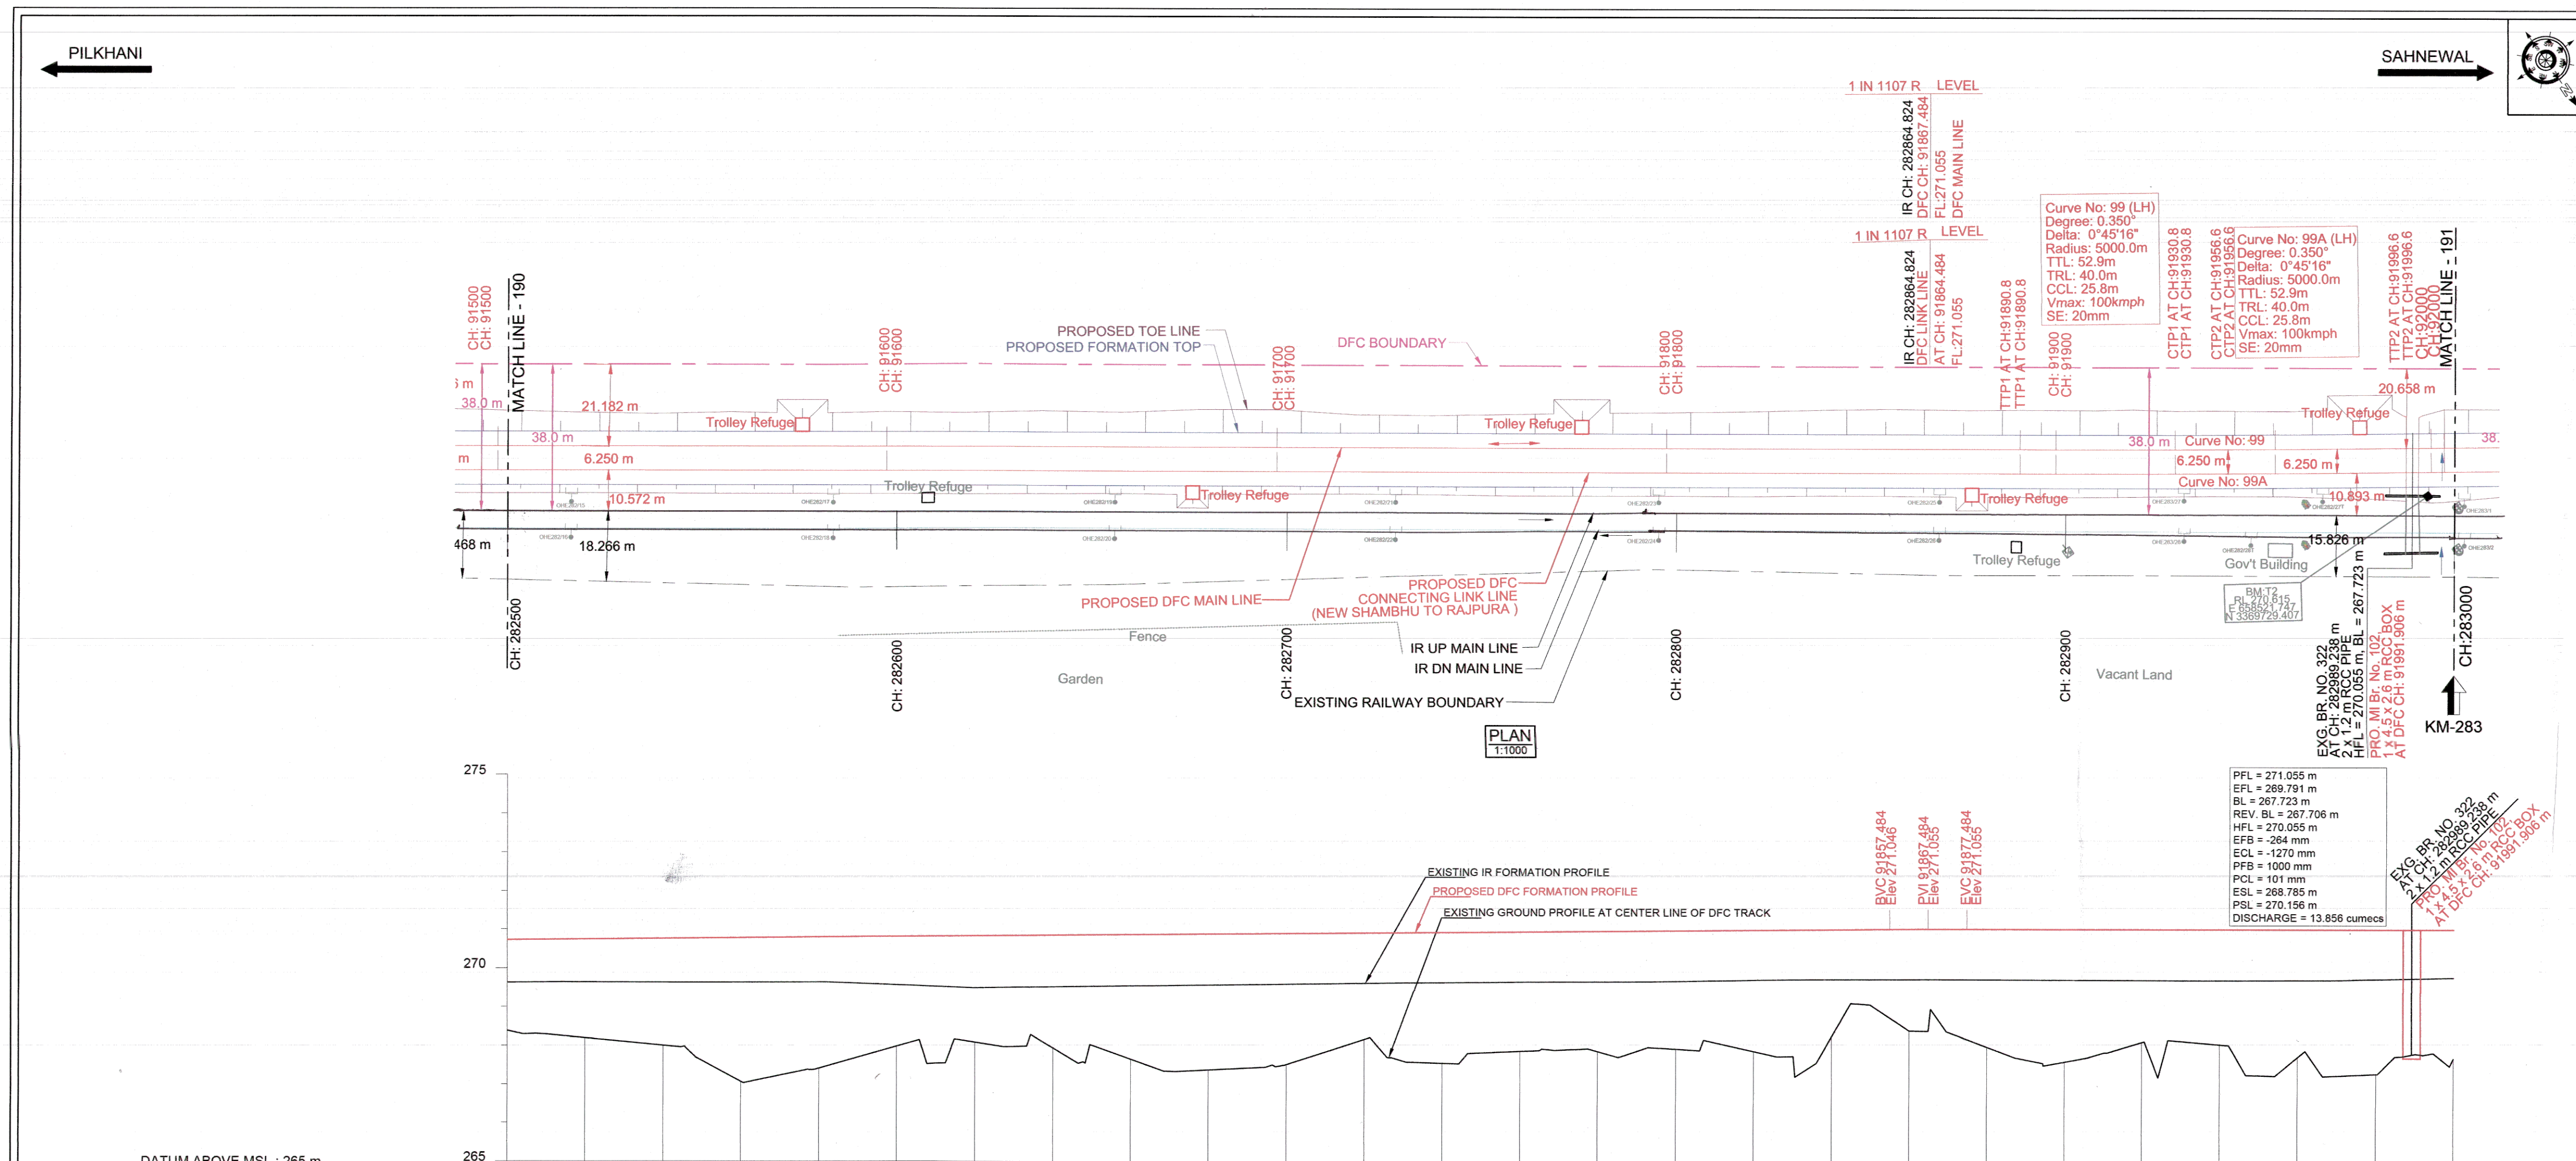

HORIZONTAL ALIGNMENT		L = 634.819m										TL=40m R=5000m TL=40m L=143.632m									
VERTICAL ALIGNMENT		L=536.8m 1 IN 1107 R										L=20.0m R=22145m L=758.1m LEVEL									
TRACK DISTANCE FROM EXISTING NEAREST IR UP MAIN LINE TO PROPOSED DFC LINKED LINE		10.564	10.572	10.568	10.579	10.596	10.470	10.331	10.380	10.420	10.425	10.438	10.458	10.468	10.457	10.448	10.436	10.428	10.418	10.402	11.289
HEIGHT OF BANKING(+) / DEPTH OF CUTTING(-) (PFL-GL)		+2.345	+2.552	+2.762	+3.714	+3.394	+2.842	+2.751	+2.914	+3.221	+3.512	+3.394	+2.750	+3.380	+3.086	+3.106	+3.059	+3.135	+2.771	+2.628	+3.336
EXG GROUND LEVEL AT CENTER LINE OF PRO. DFC TRACK (GL)		268.380	268.191	267.999	267.065	267.403	267.973	268.083	267.938	267.649	267.376	267.522	268.174	267.562	267.874	267.872	267.937	267.879	267.843	268.261	267.719
EXG GROUND LEVEL AT TOE LOCATION OF PRO. DFC TRACK		267.302	267.801	268.079	267.527	267.420	267.807	267.443	267.272	267.345	267.504	267.726	267.861	267.925	267.811	267.977	267.865	267.804	267.843	268.261	267.719
DIFFERENCE BETWEEN PRO FORMATION LEVEL AND EXG.FORMATION LEVEL (PFL-EFL)		1.084	1.105	1.128	1.146	1.160	1.247	1.340	1.331	1.322	1.314	1.306	1.297	1.294	1.293	1.302	1.304	1.288	1.287	1.287	1.289
PRO. DFC FORMATION LEVEL (PFL)		270.725	270.743	270.761	270.779	270.797	270.815	270.834	270.852	270.870	270.888	270.906	270.924	270.942	270.960	270.978	270.996	270.976	270.955	270.932	270.909
EXG. FORMATION LEVEL OF EXG IR UP MAIN LINE (EFL)		269.631	269.638	269.633	269.633	269.637	269.568	269.494	269.521	269.548	269.574	269.600	269.627	269.648	269.667	269.676	269.682	269.746	269.745	269.745	269.745
DIFFERENCE BETWEEN PRO. DFC RAIL LEVEL AND EXG. RAIL LEVEL (PRL - ERL)		1.148	1.159	1.182	1.200	1.214	1.301	1.394	1.385	1.376	1.368	1.360	1.351	1.348	1.347	1.356	1.359	1.342	1.341	1.352	1.337
PRO. DFC RAIL LEVEL (PRL)		271.467	271.485	271.503	271.521	271.539	271.557	271.576	271.594	271.612	271.630	271.648	271.666	271.684	271.702	271.720	271.738	271.756	271.774	271.792	271.797
EXG.RAIL LEVEL OF NEAREST IR UP MAIN LINE(ERL)		270.319	270.326	270.321	270.321	270.325	270.256	270.182	270.209	270.236	270.262	270.288	270.315	270.336	270.355	270.364	270.380	270.414	270.433	270.440	270.440
EQUIVALENT CHAINAGE ON PROPOSED DFC TRACK		91502.7	91522.7	91542.7	91562.7	91582.7	91602.7	91622.7	91642.7	91662.7	91682.7	91702.7	91722.7	91742.7	91762.7	91782.7	91802.7	91822.7	91842.7	91862.7	91882.7
EXISTING IR CHAINAGE		282500.0	282500.0	282540.0	282560.0	282580.0	282600.0	282620.0	282640.0	282660.0	282680.0	282700.0	282720.0	282740.0	282760.0	282780.0	282800.0	282820.0	282840.0	282860.0	282880.0

REVISION DETAILS		SCALE		DESIGN CONSULTANT		CONTRACTOR		ENGINEER		CONTRACTOR		ENGINEER	
2	26.03.18	UPDATED AS PER PMC COMMENTS	FOR APPROVAL	aarvee associates		GIL - TPL JV		DB Engineering & Consulting GmbH		B. RAMAKRISHNA		H.D. VIDJAK	
1	16.03.18	COMPLIANCE TO PMC COMMENTS, DT. 30.12.17	FOR APPROVAL							H.B. PANDA		DINESH PANDAY	
0	13.12.17	INITIAL SUBMISSION	FOR APPROVAL							DINESH PANDAY		BABULAL SAHU	
REVISION DETAILS		PURPOSE OF ISSUE		SHEET SIZE : A1		SHEET NO. : 191A OF 346		DATE : 26.03.2018		REV. No.		STATUS	

WITH NEW GTS VALUE

NOTE:-

- PROPOSED WORKS ARE SHOWN IN RED.
- IR PROPOSALS ARE SHOWN IN VIOLET.
- ALL DIMENSIONS ARE SHOWN IN METRES.
- THIS DRAWING IS PREPARED BASED ON LATEST SURVEY DATA HELD ON AUG-2016. GTS BENCH MARK OF 261.850 m CONSIDERED ON TOP OF CANAL BRIDGE ABUTMENT AT DORAH VILLAGE ALONG THE NH1.
- MINIMUM OF 6m TRACK CENTER MAINTAINED BETWEEN ADJACENT TRACK TO EXISTING IR TRACK IN STATION YARD PORTION.
- DFC CHAINAGE OF 0.000 m IS WITH REFERENCE TO THE IR KM POST OF 192.000
- PUBLIC UTILITIES, HT, LT LINES AND OFC CABLES, WATER LINES etc., INTERFERING DFC LINES SHALL BE RELOCATED.
- PLAN OF LONGITUDINAL AS WELL AS CROSS DRAINAGE WORKS BETWEEN IR & DFC BANKS SHALL BE SUBMITTED SEPARATELY FOR APPROVAL.
- ALL CANAL BRIDGES REQUIRED TO BE APPROVED BY CANAL AUTHORITIES.
- NECESSARY EMBANKMENT/SLOPE PROTECTION WORK DESIGN & DRAWING WILL BE SUBMITTED SEPARATELY.
- UNDERTAKING OF NO EXTRA CLAIM FOR DESIGN & EXECUTION OF WORK DUE TO CHANGE IN TURNOUT LENGTH AND DRAINAGE DESIGN HAS BEEN GIVEN BY GIL-TPL JV/EDFC/301/2017-18/DESIGN/0424 DATED 26.07.2017
- DURING CENTER LINE STAKING IF GROUND LEVEL SHOWN, FOUND TO BE MAJOR VARIATION, DESIGNER TO BE INFORMED.
- THE LAND BOUNDARY SHOWN IN THE ALIGNMENT DRAWING IS TENTATIVE ONLY. FOR ACTUAL ACQUISITION REFER LAND PLANS OF THAT CORRESPONDING SECTION.
- FOR DETAILS OF DFC MAIN LINE FROM NEW SHAMBHU TO RAJAPURA REFER SEPARATE DRAWINGS.
- BR. NO. 322/102 DATA PROVIDED AS PER DEFINITIVE DRAWING NO. 301-1/IRB/1556 & 301-1/IRB/1557.
- LOCATIONS PRONE TO FLOODING IN THE SECTION: NO
- WATER LOGGED AREA / MARSHY LAND WHERE GROUND IMPROVEMENT REQUIRED: NO
- LOCATION OF TROLLEY REFUGE SHOWN ARE INDICATIVE, WILL BE FINALISED SEPARATELY.

REFERENCE DRAWINGS:-

- FOR KEY PLAN REFER DRAWING NO. 301-2/AL/0001.
- FOR LEGEND AND ABBREVIATIONS REFER DRAWING NO. 301-2/AL/1000.

THIS CONSTRUCTION DRAWING OF PLAN & PROFILE IS PREPARED BASED ON PRELIMINARY DRAWING APPROVAL BY DFCCIL COMMUNICATED UNDER LETTER NO. EDCF 3/PMC/CON/11/2017/0715 DATED : 20.11.2017

TRACK STRUCTURE		
RAIL SECTION: 60Kg/m (UIC 60Kg/m) DFC LINE: 60Kg/m (UIC 60Kg/m) IR MAIN LINE: 52Kg/m	Difference between FL and RL	
	IR Line	DFC
RUBBER PAD	172mm	172mm
SLEEPER DEPTH	6mm	10mm
BALLAST CUSHION	210mm	210mm
Total Depth (FL TO RL)	300mm	350mm

PROJECT OFFICE / DFCCIL

SURINDER PAL
CPM

PARDEEP PURI
DY. CPM / ENGG. / LDH

CHANKY GARG
PM / ELECT. / UMB

SURENDRA SINGH
DPM / ENGG. / UMB

S.P. SHARMA
DPM / ELECT. / UMB

DEBASISH NAYAK
APM / S&T / UMB

P. KATHPALIA
ACPM / ELECT. / UMB

ASHINAV SINGH
PM / S&T

OWNER

DEDICATED FREIGHT CORRIDOR CORPORATION OF INDIA LTD.
(A GOVERNMENT OF INDIA ENTERPRISE)
PROJECT OFFICE/AMBALA UNIT, OLD RAILWAY COLONY (NEAR ANAND MARKET), AMBALA CANTT-133001.
CORPORATE IDENTITY NO. : U60232DL2006GOI155068

PROJECT

EASTERN DEDICATED FREIGHT CORRIDOR
SAHNEWAL TO PILKHANI
CONTRACT PACKAGE - 301

TITLE

PLAN & PROFILE
FROM IR KM: 282.500 TO 283.000
FROM DFC KM: 91.503 TO 92.003
(CONNECTING LINK LINE)

DFCC APPR. NO. -
ENGG. APPR. NO. -
DRG. NO. : 301-2/AL/1191A
SHEET NO. : 191A OF 346
DATE : 26.03.2018

REV. No. 2
STATUS D