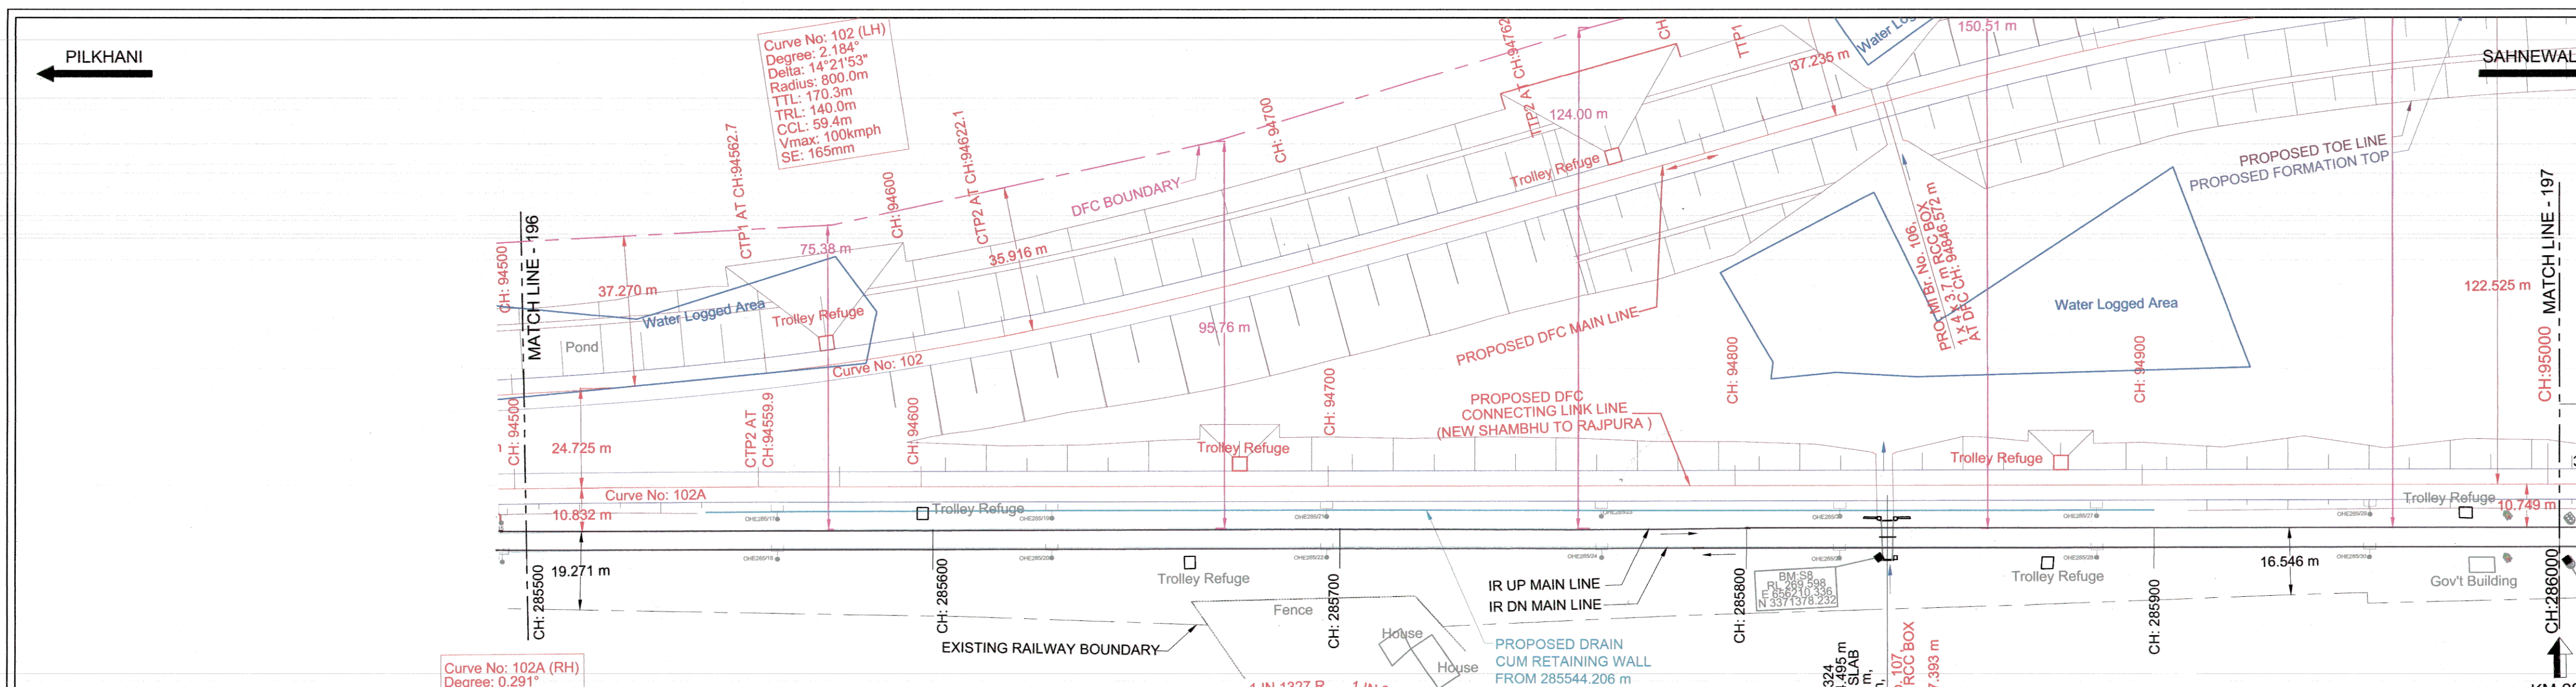


HORIZONTAL ALIGNMENT		R = 6000m TL = 20m		L = 719.667m	
VERTICAL ALIGNMENT		L = 1490.5 m 1 IN 1327 R		L = 20.0 m R = 5391 m	
TRACK DISTANCE FROM EXISTING NEAREST IR UP MAIN LINE TO PROPOSED DFC LINKED LINE		10.975	10.840	10.745	10.610
HEIGHT OF BANKING(+) / DEPTH OF CUTTING(-) (PFL-GL)		+2.258	+2.074	+2.455	+2.743
EXG GROUND LEVEL AT CENTER LINE OF PRO. DFC TRACK (GL)		266.407	266.607	266.241	265.968
EXG GROUND LEVEL AT TOE LOCATION OF PRO. DFC TRACK		267.108	267.603	267.375	267.224
DIFFERENCE BETWEEN PRO FORMATION LEVEL AND EXG.FORMATION LEVEL. (PFL-EFL)		1.251	1.291	1.335	1.385
PRO. DFC FORMATION LEVEL (PFL)		270.655	270.651	270.696	270.711
EXG. FORMATION LEVEL OF EXG IR UP MAIN LINE (EFL)		269.414	269.390	269.291	269.326
DIFFERENCE BETWEEN PRO. DFC RAIL LEVEL AND EXG. RAIL LEVEL (PRL - ERL)		1.305	1.345	1.389	1.439
PRO. DFC RAIL LEVEL (PRL)		271.407	271.423	271.438	271.453
EXG. RAIL LEVEL OF NEAREST IR UP MAIN LINE (ERL)		270.102	270.078	270.049	270.014
EQUIVALENT CHAINAGE ON PROPOSED DFC TRACK		94502.7	94522.7	94542.8	94562.9
EXISTING IR CHAINAGE		285500.0	285520.0	285540.0	285560.0

226.03.18UPDATED AS PER PMC COMMENTSFOR APPROVAL

116.03.18COMPLIANCE TO PMC COMMENTS, DL 30.12.17FOR APPROVAL

013.12.17INITIAL SUBMISSIONFOR APPROVAL

REVISION DETAILS

HOR - 1:1000

VER - 1:100

SHEET SIZE : A1

DESIGN CONSULTANT

CONTRACTOR

ENGINEER

CONTRACTOR

ENGINEER

WITH NEW GTS VALUE

SHEET NO. 197A OF 346

NOTE:

1. PROPOSED WORKS ARE SHOWN IN RED.

2. IR PROPOSALS ARE SHOWN IN VIOLET.

3. ALL DIMENSIONS ARE SHOWN IN METRES.

4. THIS DRAWING IS PREPARED BASED ON LATEST SURVEY DATA HELD ON AUG-2016. GTS BENCH MARK OF 261.850 m CONSIDERED ON TOP OF CANAL BRIDGE ABUTMENT AT DORAHA VILLAGE ALONG THE NH1.

5. MINIMUM OF 6m TRACK CENTER MAINTAINED BETWEEN ADJACENT TRACK TO EXISTING IR TRACK IN STATION YARD PORTION.

6. DFC CHAINAGE OF 0.000 m IS WITH REFERENCE TO THE IR KM POST OF 122.000

7. PUBLIC UTILITIES, HT, LT LINES AND DFC CABLES, WATER LINES etc., INTERFERING DFC LINES SHALL BE RELOCATED.

8. PLAN OF LONGITUDINAL AS WELL AS CROSS DRAINAGE WORKS BETWEEN IR & DFC BANKS SHALL BE SUBMITTED SEPARATELY FOR APPROVAL.

9. ALL CANAL BRIDGES REQUIRED TO BE APPROVED BY CANAL AUTHORITIES.

10. NECESSARY EMBANKMENT/SLOPE PROTECTION WORK DESIGN & DRAWING WILL BE SUBMITTED SEPARATELY.

11. UNDERTAKING OF NO EXTRA CLAIM FOR DESIGN & EXECUTION OF WORK DUE TO CHANGE IN TURNOUT LENGTH AND DRAINAGE DESIGN HAS BEEN GIVEN BY GIL-TPL

12. DURING CENTER LINE STAKING IF GROUND LEVEL SHOWN, FOUND TO BE MAJOR VARIATION, DESIGNER TO BE INFORMED.

13. THE LAND BOUNDARY SHOWN IN THE ALIGNMENT DRAWING IS TENTATIVE ONLY. FOR ACTUAL ACQUISITION REFER LAND PLANS OF THAT CORRESPONDING SECTION.

14. FOR DETAILS OF DFC MAIN LINE FROM NEW SHAMBU TO RAJPURA REFER SEPARATE DRAWINGS.

15. BR. NO. 324/107 DATA PROVIDED AS PER PRELIMINARY DRAWING NO. 301-1/RB/1626 & 301-1/RB/1627.

16. LOCATIONS PRONE TO FLOODING IN THE SECTION. NO

17. WATER LOGGED AREA/ MARSHY LAND WHERE GROUND IMPROVEMENT REQUIRED. NO

18. LOCATION OF TROLLEY REFUGE SHOWN ARE INDICATIVE, WILL BE FINALISED SEPARATELY.

REFERENCE DRAWINGS:-

1. FOR KEY PLAN REFER DRAWING NO. 301-2/AL/0001.

2. FOR LEGEND AND ABBREVIATIONS REFER DRAWING NO. 301-2/AL/1000.

THIS CONSTRUCTION DRAWING OF PLAN & PROFILE IS PREPARED BASED ON PRELIMINARY DRAWING APPROVAL BY DFCIL COMMUNICATED UNDER LETTER NO. EDFC 3/PMC/CON/11/2017/0715 DATED : 20.11.2017

TRACK STRUCTURE

RAIL SECTION: 60Kg/m (UIC 60Kg/m) DFC LINE: 60Kg/m (UIC 60Kg/m) IR MAIN LINE-52Kg/m	Difference between FL and RL	
	IR Line	DFC
RUBBER PAD	172mm	172mm
SLEEPER DEPTH	6mm	10mm
BALLAST CUSHION	210mm	210mm
	300mm	350mm
Total Depth (FL TO RL)	688mm	742mm

PROJECT OFFICE / DFCIL

SURINDER PAL
CPM

PARDEEP PURI
DY. CPM / ENGG. / LDH

P.KATHPALIA
ACPM / ELECT. / UMB

CHANKY GARG
PM / ELECT. / UMB

ABHINAV SINGH
PM / S&T

SURENDRA SINGH
DPM / ENGG. / UMB

S.P.SHARMA
DPM / ELECT. / UMB

DEBASISH NAYAK
APM / S&T / UMB

OWNER

DEDICATED FREIGHT CORRIDOR CORPORATION OF INDIA LTD.
(A GOVERNMENT OF INDIA ENTERPRISE)
PROJECT OFFICE/AMBALA UNIT: OLD RAILWAY COLONY (NEAR ANAND MARKET), AMBALA CANTT-133001.
CORPORATE IDENTITY NO. : U60232DL20060H155068

PROJECT

EASTERN DEDICATED FREIGHT CORRIDOR
SAHNEWAL TO PILKHANI
CONTRACT PACKAGE - 301

TITLE

PLAN & PROFILE
FROM IR KM: 285.500 TO 286.000
FROM DFC KM: 94.503 TO 95.003
(CONNECTING LINK LINE)

DFCC APPR. NO. -
ENGG. APPR. NO. -
DRG. NO. - 301-2/AL/1197A
SHEET NO. - 197A OF 346
DATE: 26.03.2018

REV. No. 2
STATUS D