
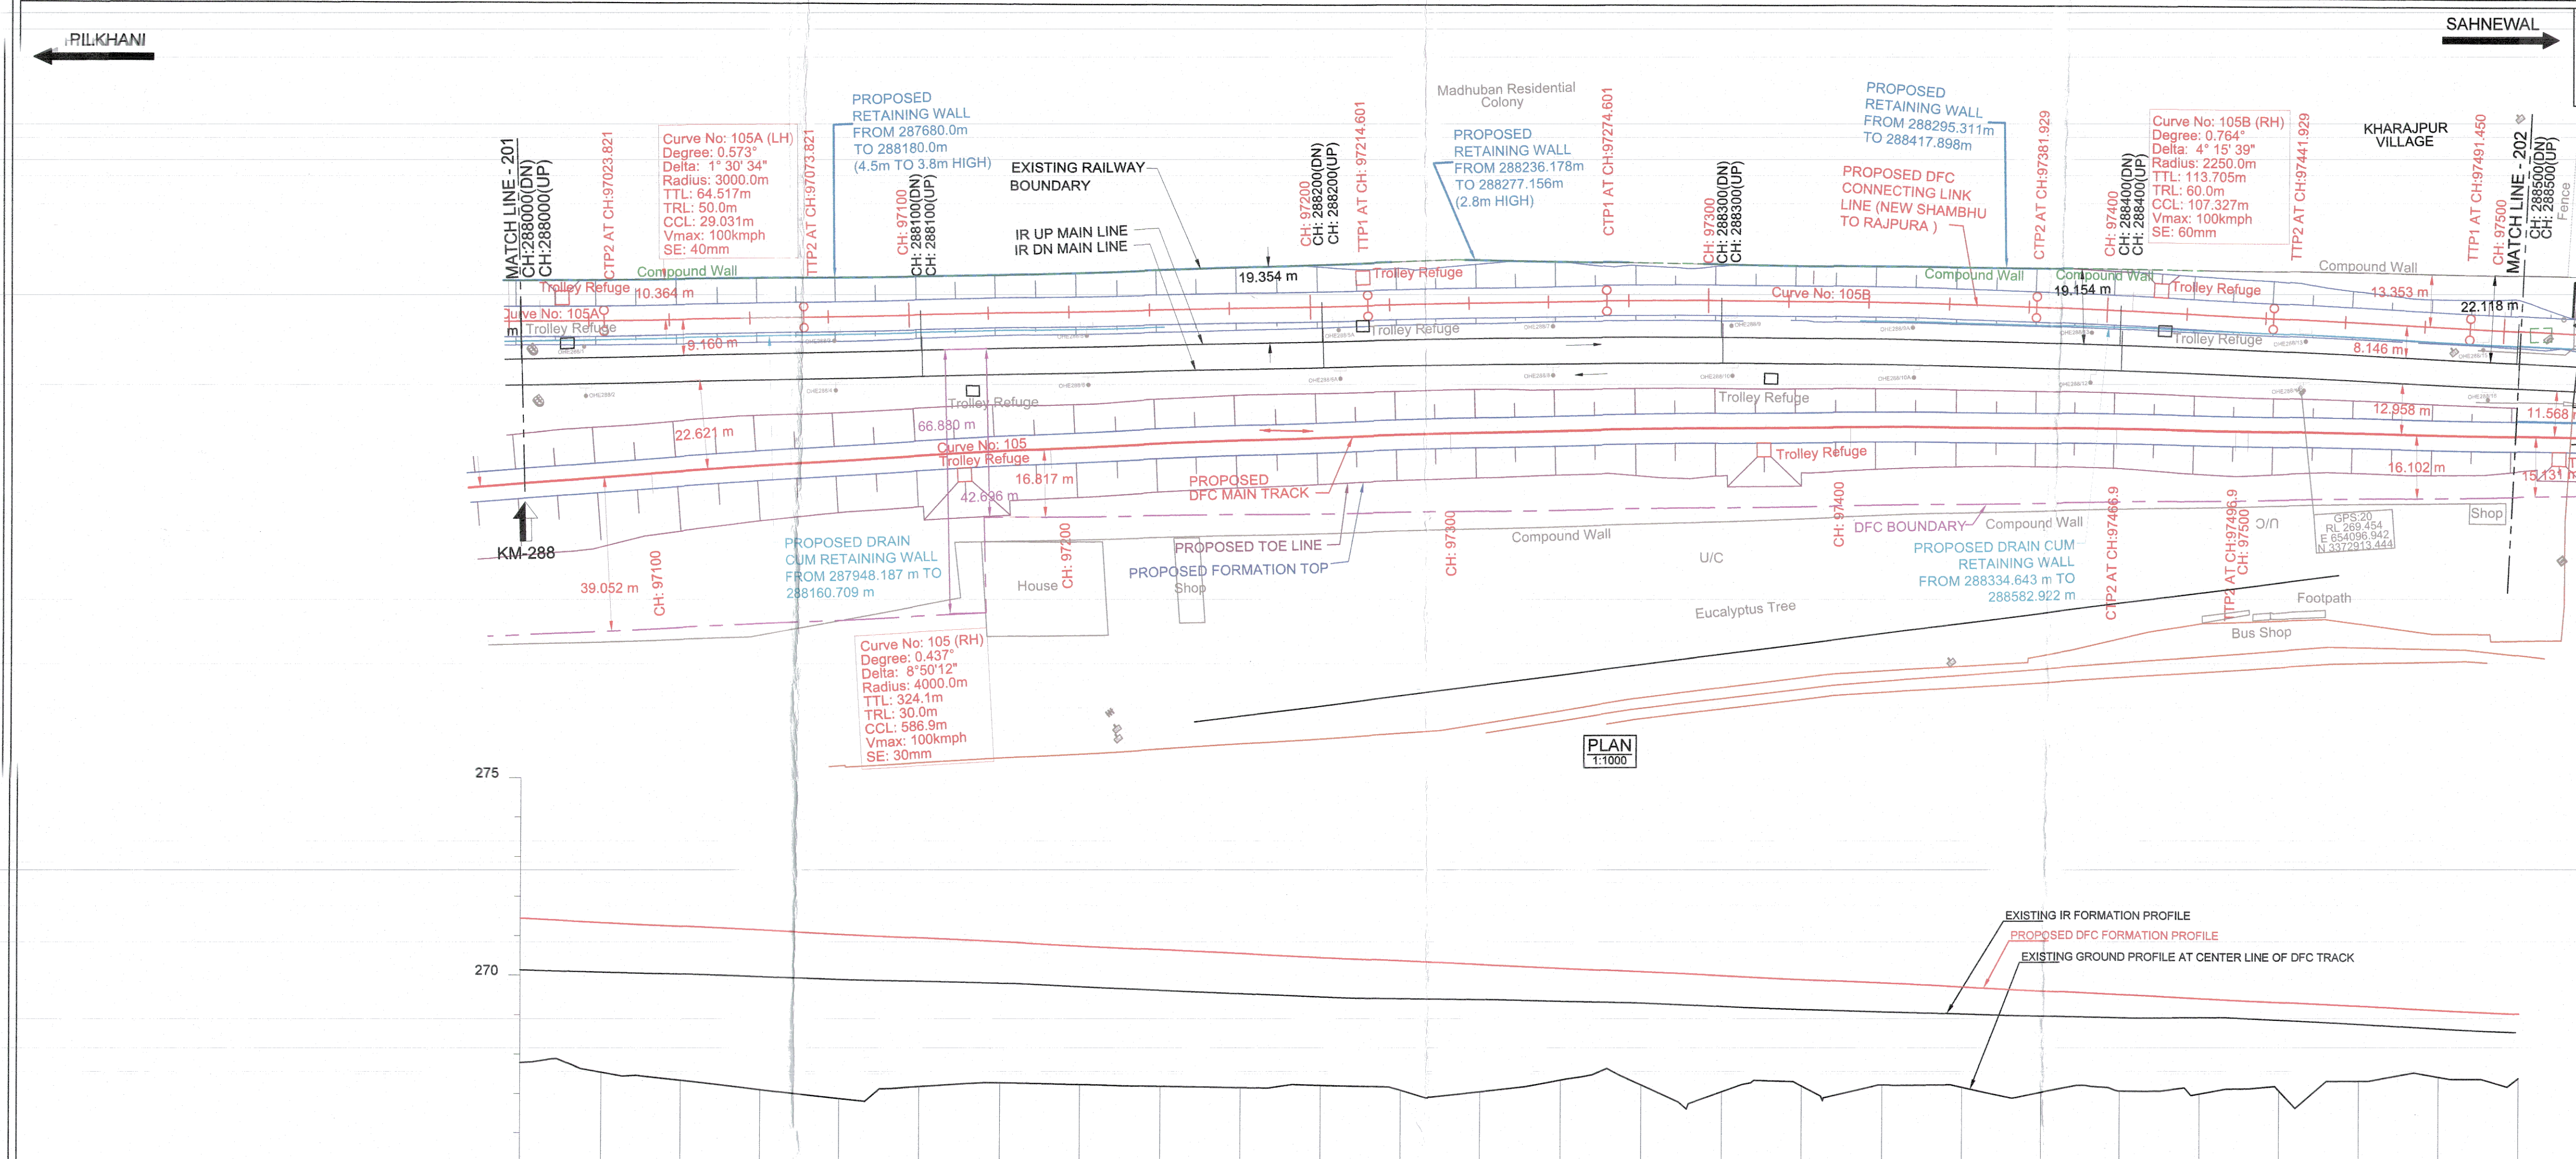


HORIZONTAL ALIGNMENT		R = 3000m		TL = 50m		L = 140.780m		TL = 60m		R = 2250m		TL = 60m		L = 49.484m		TL = 50m	
VERTICAL ALIGNMENT																	
TRACK DISTANCE FROM EXISTING NEAREST IR UP MAIN LINE TO PROPOSED DFC LINKED LINE		9.581	9.306	9.157	9.074	9.018	8.993	8.970	8.956	8.944	8.931	8.915	8.952	9.002	9.186	9.286	9.372
HEIGHT OF BANKING(+) / DEPTH OF CUTTING(-) (PFL-GL)		+3.792	+3.872	+3.880	+4.012	+4.133	+4.197	+4.299	+4.060	+3.864	+3.753	+3.628	+4.299	+3.205	+2.910	+2.846	+2.781
EXG GROUND LEVEL AT CENTER LINE OF PRO. DFC TRACK (GL)		267.647	267.476	267.377	267.154	266.942	266.787	266.594	266.742	266.847	266.868	266.702	266.139	267.143	267.346	267.319	267.293
EXG GROUND LEVEL AT TOE LOCATION OF PRO. DFC TRACK		266.643	266.798	266.929	267.017	267.004	266.691	266.549	266.551	266.736	266.922	267.190	267.914	267.256	266.848	267.319	267.293
DIFFERENCE BETWEEN PRO FORMATION LEVEL AND EXG FORMATION LEVEL (PFL-EFL)		1.308	1.267	1.215	1.180	1.147	1.100	1.051	1.033	1.025	1.015	1.002	0.957	0.888	0.836	0.781	0.783
PRO. DFC FORMATION LEVEL (PFL)		271.439	271.348	271.257	271.166	271.075	270.984	270.893	270.802	270.711	270.621	270.530	270.438	270.346	270.256	270.165	270.074
EXG. FORMATION LEVEL OF EXG IR UP MAIN LINE (EFL)		270.131	270.081	270.042	269.966	269.928	269.884	269.842	269.769	269.686	269.606	269.528	269.438	269.346	269.256	269.165	269.074
DIFFERENCE BETWEEN PRO DFC RAIL LEVEL AND EXG. RAIL LEVEL (PRL - ERL)		1.362	1.321	1.269	1.234	1.201	1.154	1.105	1.087	1.079	1.069	1.056	1.011	0.942	0.890	0.845	0.837
PRO. DFC RAIL LEVEL (PRL)		272.181	272.090	271.999	271.908	271.817	271.726	271.635	271.544	271.453	271.363	271.272	271.180	271.090	270.998	270.907	270.816
EXG. RAIL LEVEL OF NEAREST IR UP MAIN LINE (ERL)		270.819	270.769	270.730	270.674	270.616	270.572	270.530	270.457	270.374	270.284	270.216	270.169	270.148	270.108	270.062	270.041
EQUIVALENT CHAINAGE ON PROPOSED DFC TRACK		97002.9	97022.9	97042.9	97062.9	97082.9	97102.9	97122.9	97142.9	97162.9	97182.9	97202.9	97222.9	97242.9	97262.9	97282.9	97302.9
EXISTING IR CHAINAGE		288000.0	288020.0	288040.0	288060.0	288080.0	288100.0	288120.0	288140.0	288160.0	288180.0	288200.0	288220.0	288240.0	288260.0	288280.0	288300.0

L-SECTION (CONNECTING LINK LINE)

REV.	DATE	REVISION DETAILS	PURPOSE OF ISSUE
3	08.05.23	REVISED AS PER SITE CONDATION	FOR APPROVAL
2	26.03.18	UPDATED AS PER PMC COMMENTS	FOR APPROVAL
1	16.03.18	COMPLIANCE TO PMC COMMENTS, Dt. 30.12.17	FOR APPROVAL
0	13.12.17	INITIAL SUBMISSION	FOR APPROVAL

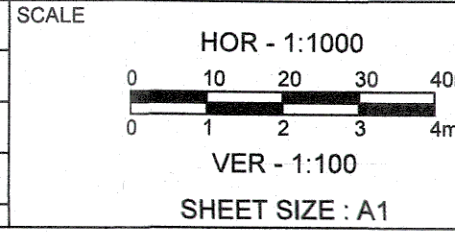

DESIGN CONSULTANT: **carvee associates** architects engineers & consultants pvt.ltd.

CONTRACTOR: **GIL - TPL JV**

ENGINEER: **DB Engineering & Consulting GmbH**

CONTRACTOR: **GIL - TPL JV**

ENGINEER: **DB Engineering & Consulting GmbH**

CONTRACTOR: **GIL - TPL JV**

ENGINEER: **DB Engineering & Consulting GmbH**

CONTRACTOR: **GIL - TPL JV**

ENGINEER: **DB Engineering & Consulting GmbH**

- WITH NEW GTS VALUE**
- NOTE:-**
- PROPOSED WORKS ARE SHOWN IN RED.
 - IR PROPOSALS ARE SHOWN IN VIOLET.
 - ALL DIMENSIONS ARE SHOWN IN METRES.
 - THIS DRAWING IS PREPARED BASED ON LATEST SURVEY DATA HELD ON AUG-2016. GTS BENCH MARK OF 261.850 m CONSIDERED ON TOP OF CANAL BRIDGE ABUTMENT AT DORAH VILLAGE ALONG THE NH1.
 - MINIMUM OF 6m TRACK CENTER MAINTAINED BETWEEN ADJACENT TRACK TO EXISTING IR TRACK IN STATION YARD PORTION.
 - DFC CHAINAGE OF 0.000 m IS WITH REFERENCE TO THE IR KM POST OF 192.000
 - PUBLIC UTILITIES, HT, LT LINES AND OFC CABLES, WATER LINES etc., INTERFERING DFC LINES SHALL BE RELOCATED.
 - PLAN OF LONGITUDINAL AS WELL AS CROSS DRAINAGE WORKS BETWEEN IR & DFC BANKS SHALL BE SUBMITTED SEPARATELY FOR APPROVAL.
 - ALL CANAL BRIDGES REQUIRED TO BE APPROVED BY CANAL AUTHORITIES.
 - NECESSARY EMBANKMENT/SLOPE PROTECTION WORK DESIGN & DRAWING WILL BE SUBMITTED SEPARATELY.
 - UNDERTAKING OF NO EXTRA CLAIM FOR DESIGN & EXECUTION OF WORK DUE TO CHANGE IN TURNOUT LENGTH AND DRAINAGE DESIGN HAS BEEN GIVEN BY GIL-TPL
 - DURING CENTER LINE STAKING IF GROUND LEVEL SHOWN, FOUND TO BE MAJOR VARIATION, DESIGNER TO BE INFORMED.
 - THE LAND BOUNDARY SHOWN IN THE ALIGNMENT DRAWING IS TENTATIVE ONLY. FOR ACTUAL ACQUISITION REFER LAND PLANS OF THAT CORRESPONDING SECTION.
 - FOR DETAILS OF DFC MAIN LINE FROM NEW SHAMBHU TO RAJPURA REFER SEPARATE DRAWINGS.
 - LOCATIONS PRONE TO FLOODING IN THE SECTION: NO
 - WATER LOGGED AREA/ MARSHY LAND WHERE GROUND IMPROVEMENT REQUIRED: NO
 - LOCATION OF TROLLEY REFUGE SHOWN ARE INDICATIVE, WILL BE FINALISED SEPARATELY

- REFERENCE DRAWINGS:-**
- FOR KEY PLAN REFER DRAWING NO. 301-2/AL/0001.
 - FOR LEGEND AND ABBREVIATIONS REFER DRAWING NO. 301-2/AL/1000.
 - mention all alignment of drain.

THIS CONSTRUCTION DRAWING OF PLAN & PROFILE IS PREPARED BASED ON PRELIMINARY DRAWING APPROVAL BY DFCCIL COMMUNICATED UNDER LETTER NO. ED/FC 3/PMO/CON/11/2017/0715 DATED : 20.11.2017

TRACK STRUCTURE		
RAIL SECTION: 60Kg/m (UIC 60Kg/m) DFC LINE: 60Kg/m (UIC 60Kg/m) IR MAIN LINE: 52Kg/m	Difference between FL and RL	
	IR Line	DFC
RUBBER PAD	172mm	172mm
SLEEPER DEPTH	6mm	10mm
BALLAST CUSHION	210mm	210mm
	300mm	350mm
Total Depth (FL TO RL)	688mm	742mm

PROJECT OFFICE / DFCCIL

PANKAJ KUMAR GUPTA
CGM

YOGESH KUMAR
GM / ELECT. / UMB

SANDEEP KUMAR
PM / ENGG-I / UMB

S.P. SHARMA
PM / ELECT. / UMB

MOZAHIR ANWAR
PM / S&T / UMB

OWNER: **DEDICATED FREIGHT CORRIDOR CORPORATION OF INDIA LTD.**
(A GOVERNMENT OF INDIA ENTERPRISE)
PROJECT OFFICE (AMBALA UNIT): OLD RAILWAY COLONY (NEAR ANAND MARKET), AMBALA CANTT-133001.
CORPORATE IDENTITY NO.: U60232DL2006GOI155068

PROJECT: **EASTERN DEDICATED FREIGHT CORRIDOR SAHNEWAL TO PILKHANI CONTRACT PACKAGE - 301**

TITLE: **PLAN & PROFILE FROM IR KM: 288.000 TO 288.500 (CONNECTING LINK LINE)**

DFCC APPR. NO.: **ENG. APPR. NO. -**

DRG. NO.: **301-2/AL/1202A**

SHEET NO.: **202A OF 346**

DATE: **08.05.2023**

REV. NO.: **3**

STATUS: **D**