
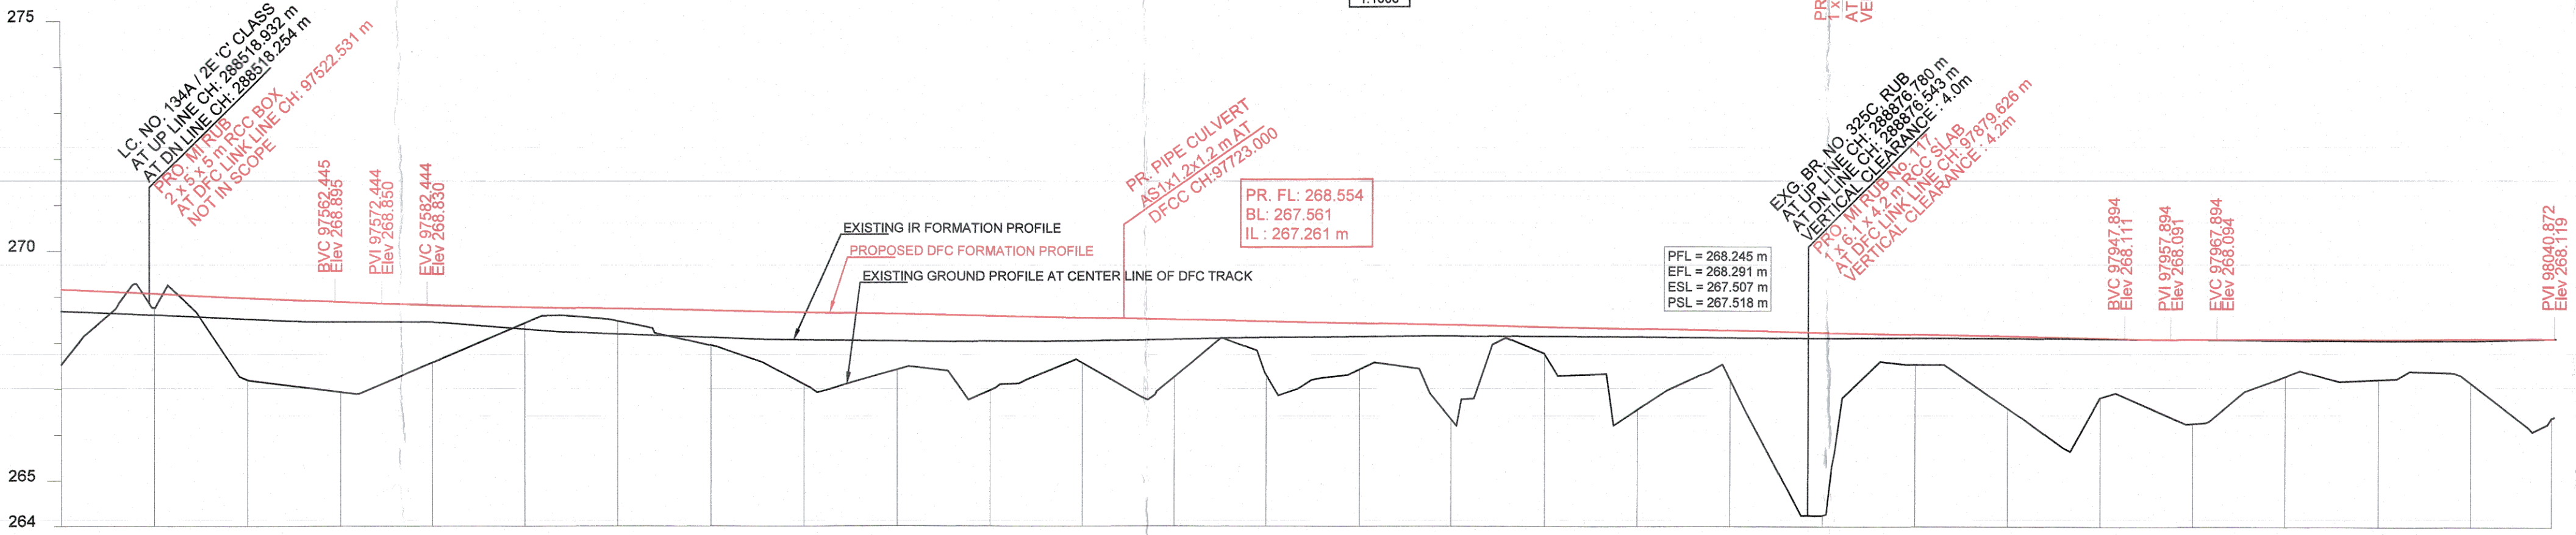


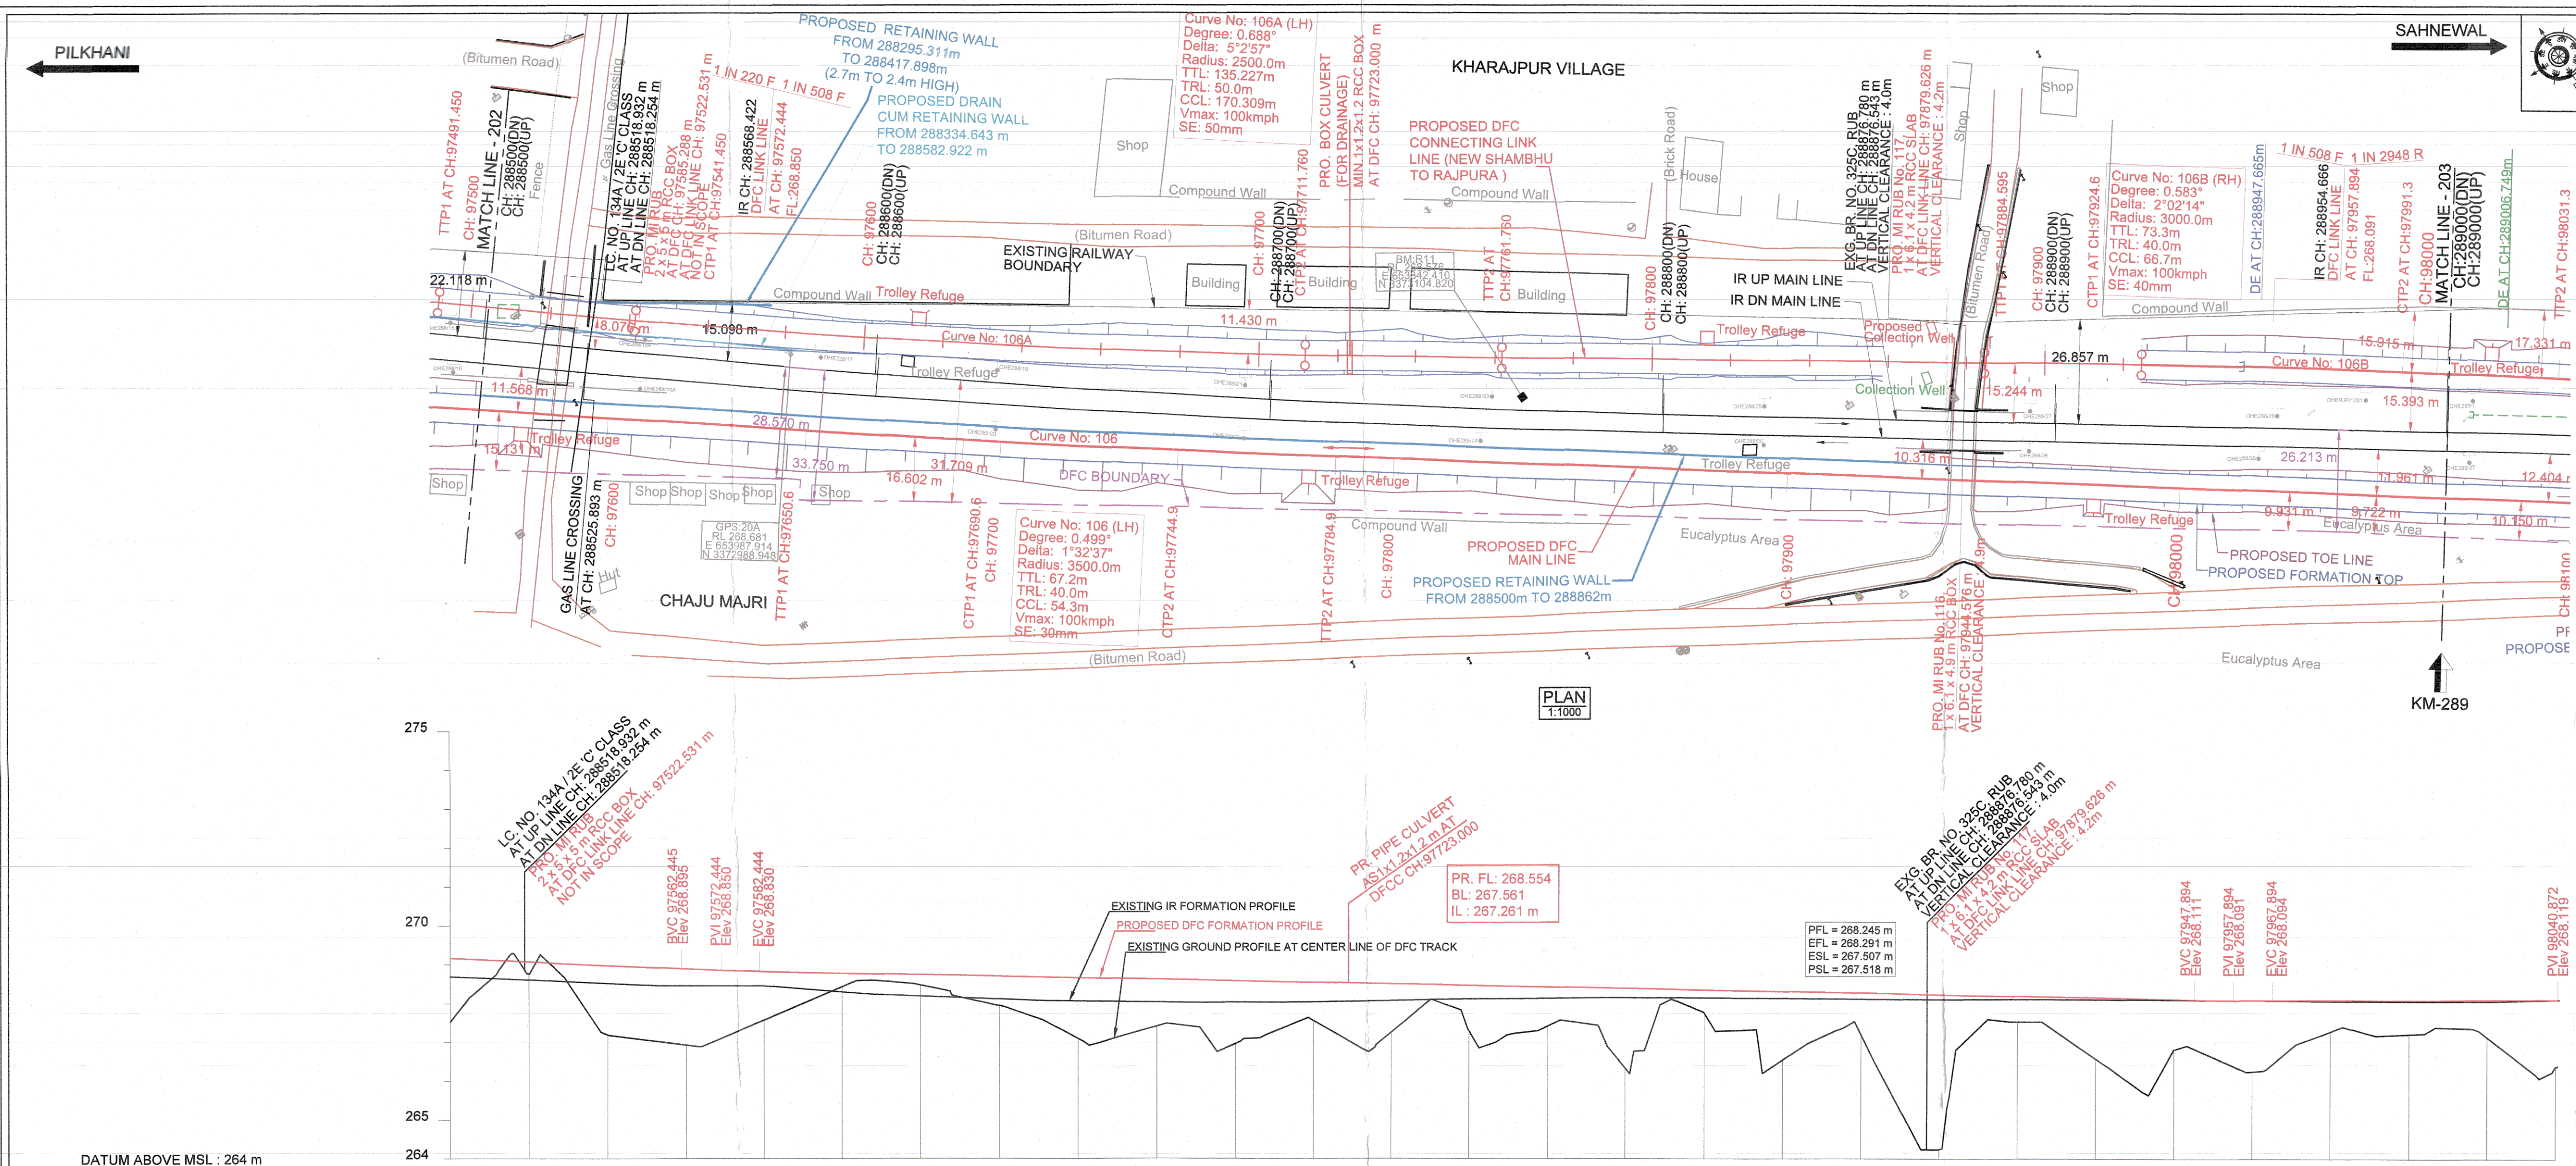

HORIZONTAL ALIGNMENT		TL=50m	R=2500m		TL=50m	L=123.801m	TL=40m	R=3000m	TL=40m	L=9.580m
VERTICAL ALIGNMENT		L=729.8 m 1 IN 220 F	L=20.0 m R=7764m	L=365.4 m 1 IN 508 F	L=20.0 m R=8654m	L=73.0 m 1 IN 2948 R				
TRACK DISTANCE FROM EXISTING NEAREST IR UP MAIN LINE TO PROPOSED DFC LINKED LINE		8.132	8.163	8.260	8.498	8.879	9.229	9.586	10.036	10.504
HEIGHT OF BANKING(+) / DEPTH OF CUTTING(-) (PFL-GL)		+1.631	+0.306	+1.783	+1.957	+1.246	+0.346	+0.271	+0.765	+1.572
EXG GROUND LEVEL AT CENTER LINE OF PRO. DFC TRACK (GL)		267.532	268.766	267.198	266.933	267.582	268.443	268.479	267.945	267.424
EXG GROUND LEVEL AT TOE LOCATION OF PRO. DFC TRACK		267.123	269.068	267.623	266.933	267.923	268.321	268.251	267.733	267.055
DIFFERENCE BETWEEN PRO FORMATION LEVEL AND EXG.FORMATION LEVEL (PFL-EFL)		0.470	0.458	0.458	0.429	0.367	0.486	0.556	0.595	0.607
PRO. DFC FORMATION LEVEL (PFL)		269.163	269.072	268.652	268.890	268.948	268.809	268.750	268.710	268.671
EXG. FORMATION LEVEL OF EXG IR UP MAIN LINE (EFL)		268.693	268.614	268.523	268.461	268.461	268.303	268.194	268.115	268.040
DIFFERENCE BETWEEN PRO DFC RAIL LEVEL AND EXG. RAIL LEVEL (PRL - ERL)		0.524	0.512	0.512	0.463	0.421	0.540	0.610	0.649	0.661
PRO. DFC RAIL LEVEL (PRL)		269.905	269.814	269.723	269.632	269.570	269.531	269.492	269.452	269.374
EXG. RAIL LEVEL OF NEAREST IR UP MAIN LINE (ERL)		269.381	269.302	269.211	269.149	269.149	268.991	268.882	268.803	268.728
EQUIVALENT CHAINAGE ON PROPOSED DFC TRACK		97003.7	97023.7	97043.6	97063.6	97083.6	97103.6	97123.5	97143.5	97163.3
EXISTING IR CHAINAGE		288500.0	288520.0	288540.0	288560.0	288580.0	288600.0	288620.0	288640.0	288660.0

3		08.05.23	REVISED AS PER SITE CONDTION	FOR APPROVAL	SCALE HOR - 1:1000 0 10 20 30 40m 0 1 2 3 4m VER - 1:100 SHEET SIZE : A1	DESIGN CONSULTANT		CONTRACTOR		ENGINEER		CONTRACTOR				ENGINEER	
2		26.03.18	UPDATED AS PER PMC COMMENTS	FOR APPROVAL		 aarvee associates architects engineers & consultants pvt.ltd.	 GIL - TPL JV		 DB Engineering & Consulting GmbH		 L.V.DUTTA DESIGNED	 GAGANDEEP ALIGNMENT EXPERT	 R.C. MISHRA TRACK HEAD	 SANJAY PRASAD SINGH CPM - APPROVED	 BABULAL SAHU REVIEWED	 H.D.VIDJAK NONO	
1		16.03.18	COMPLIANCE TO PMC COMMENTS, Dt. 30.12.17	FOR APPROVAL													
0		13.12.17	INITIAL SUBMISSION	FOR APPROVAL													
REV.		DATE		REVISION DETAILS		PURPOSE OF ISSUE											

- WITH NEW GTS VALUE**
- NOTE:-**
1. PROPOSED WORKS ARE SHOWN IN RED.
 2. IR PROPOSALS ARE SHOWN IN VIOLET.
 3. ALL DIMENSIONS ARE SHOWN IN METRES.
 4. THIS DRAWING IS PREPARED BASED ON LATEST SURVEY DATA HELD ON AUG-2016. GTS BENCH MARK OF 261.850 m CONSIDERED ON TOP OF CANAL BRIDGE ABUTMENT AT DORAHA VILLAGE ALONG THE NH.
 5. MINIMUM OF 6m TRACK CENTER MAINTAINED BETWEEN ADJACENT TRACK TO EXISTING IR TRACK IN STATION YARD PORTION.
 6. DFC CHAINAGE OF 0.000 m IS WITH REFERENCE TO THE IR KM POST OF 192.000
 7. PUBLIC UTILITIES, HT, LT LINES AND OFC CABLES, WATER LINES etc., INTERFERING DFC LINES SHALL BE RELOCATED.
 8. PLAN OF LONGITUDINAL AS WELL AS CROSS DRAINAGE WORKS BETWEEN IR & DFC BANKS SHALL BE SUBMITTED SEPARATELY FOR APPROVAL.
 9. ALL CANAL BRIDGES REQUIRED TO BE APPROVED BY CANAL AUTHORITIES.
 10. NECESSARY EMBANKMENT/LOPE PROTECTION WORK DESIGN & DRAWING WILL BE SUBMITTED SEPARATELY.
 11. UNDERTAKING OF NO EXTRA CLAIM FOR DESIGN & EXECUTION OF WORK DUE TO CHANGE IN TURNOUT LENGTH AND DRAINAGE DESIGN HAS BEEN GIVEN BY GIL-TPL
 12. JVEDPC/2017-18/DESIGN/0424 DATED 26.07.2017
 13. DURING CENTER LINE STAKING IF GROUND LEVEL SHOWN, FOUND TO BE MAJOR VARIATION, DESIGNER TO BE INFORMED.
 14. THE LAND BOUNDARY SHOWN IN THE ALIGNMENT DRAWING IS TENTATIVE ONLY. FOR ACTUAL ACQUISITION REFER LAND PLANS OF THAT CORRESPONDING SECTION.
 15. FOR DETAILS OF DFC MAIN LINE FROM NEW SHAMBUH TO RAJAPURA REFER SEPARATE DRAWINGS.
 16. LOCATIONS PRONE TO FLOODING IN THE SECTION: NO
 17. WATER LOGGED AREA/ MARSHY LAND WHERE GROUND IMPROVEMENT REQUIRED: NO
 18. LOCATION OF TROLLEY REFUGE SHOWN ARE INDICATIVE, WILL BE FINALISED SEPARATELY

- REFERENCE DRAWINGS :-**
1. FOR KEY PLAN REFER DRAWING NO. 301-2/AL/0001.
 2. FOR LEGEND AND ABBREVIATIONS REFER DRAWING NO. 301-2/AL/1000.
 3. mention the alignment of drain.

THIS CONSTRUCTION DRAWING OF PLAN & PROFILE IS PREPARED BASED ON PRELIMINARY DRAWING APPROVAL BY DFCCIL COMMUNICATED UNDER LETTER NO. EDCFC/3/PMC/CN/11/2017/0715 DATED : 20.11.2017

TRACK STRUCTURE		Difference between FL and RL	
RAIL SECTION: 60Kg/m (UIC 60Kg/m)		IR Line	DFC
DFC LINE: 60Kg/m (UIC 60Kg/m)		172mm	172mm
IR MAIN LINE: 52Kg/m			
RUBBER PAD		6mm	10mm
SLEEPER DEPTH		210mm	210mm
BALLAST CUSHION		300mm	350mm
Total Depth (FL TO RL)		688mm	742mm

PROJECT OFFICE / DFCCIL		
PANKAJ KUMAR GUPTA CGM		
YOGESH KUMAR GM / ELECT. / UMB		
SANDEEP KUMAR PM / ENGG-I / UMB	S.P. SHARMA PM / ELECT. / UMB	MOZAHIR ANWAR PM / S&T / UMB
SRIKANT VERMA JPM / ENGG-I / UMB	GURMEET SINGH DPM / ELECT. / UMB	DEBASISH NAYAK DPM / S&T / UMB

OWNER	DEDICATED FREIGHT CORRIDOR CORPORATION OF INDIA LTD. (A GOVERNMENT OF INDIA ENTERPRISE) PROJECT OFFICE (AMBALA UNIT): OLD RAILWAY COLONY (NEAR ANAND MARKET), AMBALA CANTT-133001. CORPORATE IDENTITY NO.: U60232DL2006GO1155068	
PROJECT	EASTERN DEDICATED FREIGHT CORRIDOR SAHNEWAL TO PILKHANI CONTRACT PACKAGE - 301	
TITLE	PLAN & PROFILE FROM IR KM: 288.500 TO 289.000 FROM DFC KM: 97.504 TO 98.023 (CONNECTING LINE)	DFCC APPR. NO. - ENGG. APPR. NO. - DRG. NO. - 301-2/AL/1203A SHEET NO. : 203A OF 346 DATE: 08.05.2023